

EnviraLuxe Fixed Lite Windows




Thermally broken aluminium



FLEXIBLE TO COMPLEMENT ANY PROJECT.

Straight-cut sashes and the clean square profile of the EnviraLuxe window provides a modern, streamlined look, while the large expanses of glass flood the home with light. Select from a range of double-glazing options, while the external glazing process making it easier to install large, heavy glazing panels on-site.

- Robust frame and deeper sash help achieve bigger windows and better acoustics.
- Square modern frame.
- Externally glazed to make it easier to glaze larger panels on-site and reduce manual handling.
- Configuration options allow for greater flexibility and bigger windows.
- Wide expanses of glass with 5 square metres of glass in a single lite.
- High performance, energy efficient double-glazing with thermally broken technology prevents heat transfer between inside and outside, reduces energy bills and offers year-round comfort.
- A range of glazing options to improve comfort, serenity, security and privacy.
- 20-24mm glazing pocket allows for bespoke high-performance energy efficient and acoustic glass.

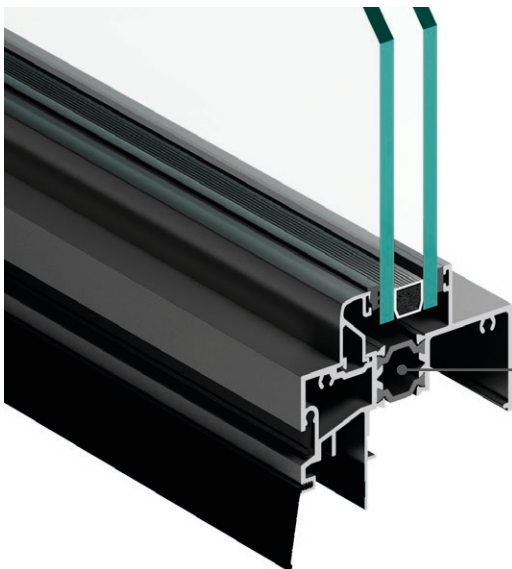

Thermally Broken Frames

Prevent heat transfer, improve energy efficiency, and offer low maintenance and durability.

EnviraLuxe Fixed Lite Windows



Thermally broken aluminium

SPECIFICATIONS

Product	Fixed Lite Window
Product Series	EnviraLuxe
Frame Profile	88mm x 35mm
Sill Options	N/A
Max Frame	Single lite 5 sqm
Max Sash	N/A
Sash Profile	N/A
Glazing	20mm – 24mm Double glazing only
Bal Rating	BAL40
Seal Type	N/A
Colour Options	Black Matt, Monument Matt, Surfmist Satin, White Gloss
Screen Options	N/A
Hardware Options	N/A
Installation Options	By builder or Stegbar installation service
Warranty	10-year warranty

For full range of configurations and standard sizes refer to the standard size and range charts.



Bold modern frame

Maximise natural light with large expanses of glass and achieve a uniform look across all windows and doors with straight-cut sashes.

PERFORMANCE

Acoustic Performance	
Performance Criteria	Glass Type
RW33	Double glazing – 4/12Ar/4
RW37	Double glazing – 4/10Ar/6.38 Lam
RW37	Double glazing – 4/10Ar/6.5 Vlam Hush
RW38	Double glazing – 6/8Ar/10.38 Lam
RW40	Double glazing – 4/8Ar/12.76 Lam
Wind & Water Performance	
Performance Criteria	Rating
SLS	1200Pa
ULS	3000Pa
Water	450Pa
N Rating	N4 Corner/N5
Thermal Performance	
Performance Criteria	Rating
Double Glazed Uw Range	1.6 – 2.7
Double Glazed SHGC Range	0.21 – 0.65

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. Stegbar reserves the right to alter or amend without prior notice data and design details specified herein. stegbar.com.au JWSNAT0601/0723